

MPX 70/6...

6-Resonator Mini-Duplexer for the 450 MHz band

- The MPX 70/6... is a 6-resonator miniaturized duplex filter for duplex radiotelephones. This compact "miniduplexer" meets the demand for a modern, space saving, high performance filter type.
- The duplexer is delivered in a low band version: MPX 70/6 L, tunable within the 406 - 440 MHz range, and a high band version: MPX 70/6 H, which is tunable within the 430 - 470 MHz range. These models are again delivered in 4 different versions according to required duplex spacing. See also "Ordering information" below.

DESCRIPTION

- The MPX 70/6... models are primarily intended for equipment, where the TX and RX operate on single frequencies, but they can also, however with slightly reduced data, be used where the TX and RX operate on several channels, i.e. within a certain port bandwidth. In the last case, factory tuning is recommended.
- The miniaturization of the filter has been realized by using special high-Q, temperature compensated helical resonators.
- The housing is made of extruded aluminium, the chassis of steel, and teflon insulation has been applied in the rigid coaxial cables and in the connectors.
- MPX 70/6... is coated with black vinyl to prevent corrosion.



ORDERING DESIGNATION

TYPE	TUNING RANGE (MHz)	TX/RX SPACING (MHz)	PRODUCT NO.
MPX 70/6L-5/7-N(f)	406 - 440	5 - 7	200000581
MPX 70/6L-7/9-N(f)	406 - 440	7 - 9	200000586
MPX 70/6L-9/13-N(f)	406 - 440	9 - 13	200000593
MPX 70/6L-13/16-N(f)	406 - 440	13 - 16	200000578
MPX 70/6H-5/7-N(f)	430 - 470	5 - 7	200000558
MPX 70/6H-7/9-N(f)	430 - 470	7 - 9	200000563
MPX 70/6H-9/13-N(f)	430 - 470	9 - 13	200000569
MPX 70/6H-13/16-N(f)	430 - 470	13 - 16	200000553
ACCESSORIES			
MOUNTING KIT FOR HYTERA RD 625			200002515
19" MPX Mounting kit			210002291


ORDERING INFORMATION

When ordering, please use the table above to select the appropriate ordering designation for the desired filter type. If duplex TX and RX frequencies are stated when ordering, the duplexers are delivered factory adjusted. If TX and RX frequencies are not stated, the filters are delivered non-adjusted.

SPECIFICATIONS

ELECTRICAL	
MODEL	MPX 70/6...
TX/RX FREQUENCY	MPX 70/6 L: 406 - 440 MHz MPX 70/6 H: 430 - 470 MHz
MAX. INPUT POWER	50 W
INSERTION LOSS TX-ANT AND ANT-RX	
Single-channel tuned:	< 1.4 dB
Multi-channel tuned, 1.5 MHz BW:	< 1.5 dB
TX NOISE SUPPRESSION ON RX-FREQUENCY	
Single-channel tuned:	>90 dB >80 dB @ 5-7 MHz spacing
Multi-channel tuned, 1.5 MHz BW:	>60 dB
RX ISOLATION ON TX-FREQUENCY	
Single-channel tuned:	>90 dB >80 dB @ 5-7 MHz spacing
Multi-channel tuned, 1.5 MHz BW:	>60 dB
TX/RX SPACING	5 - 13 MHz (see tabel)
IMPEDANCE	Nom. 50 Ω
SWR	≤ 1.4
MECHANICAL	
TEMP. RANGE	-30° C → +60° C
CONNECTORS	N-female BNC(f), TNC(f), UHF(f), SMA(f) on request
DIMENSIONS (L x W x H)	110 x 154 x 33 mm / 4.33 x 6.06 x 1.30 in.
WEIGHT	Approx. 550 g / 1.21 lb.

TYPICAL RESPONSE CURVE

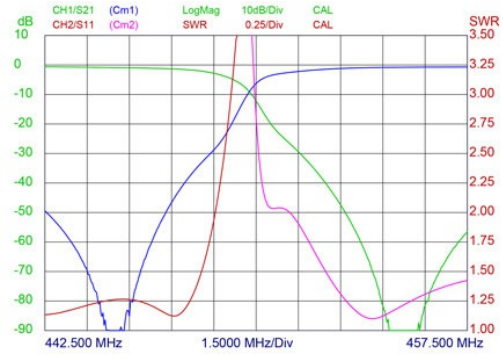

MOUNTING DETAILS

