

# GF 4G - 2500 - 2690 MHz (4G/LTE)

## End-fed 1/2 $\lambda$ coaxial dipole marine antenna



- Full omni-directional radiation pattern
- NO GROUNDPLANE NEEDED

### ELECTRICAL SPECIFICATIONS:

|              |                          |
|--------------|--------------------------|
| FREQUENCY    | 2500 - 2690 MHz (4G/LTE) |
| IMPEDANCE    | 50 ohm                   |
| POLARISATION | Vertical                 |
| GAIN         | 0 dBd, 2.1 dBi           |
| BANDWIDTH    | 100 MHz                  |
| VSWR         | < 1.5                    |
| MAX. POWER   | 40 W                     |

### MECHANICAL SPECIFICATIONS:

|                       |  |
|-----------------------|--|
| COLOR                 | White  |
| HEIGHT                | Approx. 440 mm   |
| WEIGHT                | 230 g  |
| MOUNTING              | On 1" threaded pole (G1"-11 thread) with Revolving Nut Kit or on optionally brackets |
| MATERIALS             | PU-painted heavy-duty $\varnothing$ 18 mm glass-fibre tube and chrome plated brass   |
| OPERATING TEMPERATURE | -40C to +70C   |
| CONNECTOR 1           | N-female   |
| CABLE                 | No cable supplied  |
| MOUNTING PLACE        | On deck or mast etc.   |
| INGRESS PROTECTION    | IP66   |
| SERIAL NO.            | On product label   |

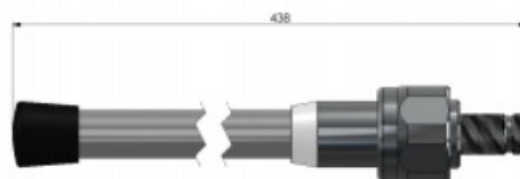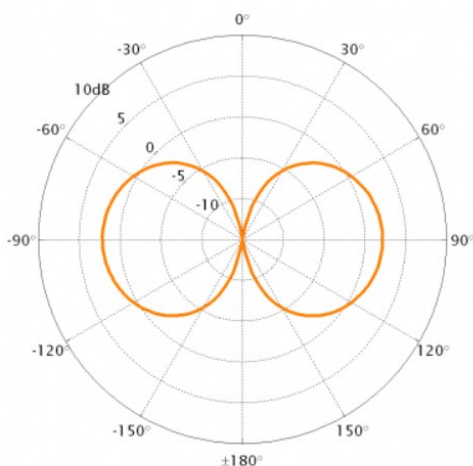

Uden omløber (20843)  
Med omløber (20843)

Midtkom NR: 11140  
Midtkom NR: 11142