

# DM 6600 F

## Goose Neck Hands-Free Microphone

### DESCRIPTION

- Goose neck microphone for hands-free operation in vehicles.
- Mounting on steering column, dash board, window frame etc.
- Attractive design.
- Uni-directional pattern.
- High-sensitivity electret cartridge with amplifier.
- Voltage supply 9–15 VDC when connected as shown in the diagram below.
- Supplied with 4 m cable terminated with a 3.5 mm plug.
- Wind cap.





### ORDERING DESIGNATIONS

TYPE NO.	PRODUCT NO.
DM 6600 F	270000038

### SPECIFICATIONS

ELECTRICAL	
MODEL	DM 6600 F
TYPE	Goose neck microphone
POLAR PATTERN	Uni-directional
IMPEDANCE	1 k $\Omega$
FREQ. RESPONSE	Shown in diagram below
SENSITIVITY	-44 dB $\pm$ 3 dB at 1 kHz rel. 1 V/Pa
CARTRIDGE TYPE	Electret
VOLTAGE SUPPLY	Nominal: 2 V (Max. 10 V) directly on cartridge
CURRENT CONSUMPTION	Approx. 0.5 mA
MECHANICAL	
CABLE	4 m 1 wire with shield with 3.5 mm plug
COLOUR	Black
TEMP. RANGE	Operating : -25 $^{\circ}$ C to + 55 $^{\circ}$ C Storage : -40 $^{\circ}$ C to + 55 $^{\circ}$ C
MATERIALS	Brass, epoxy laquered. Impact-proof ABS
DIMENSIONS	350 (L) x 12 (D) mm
WEIGHT	Approx. 100 g

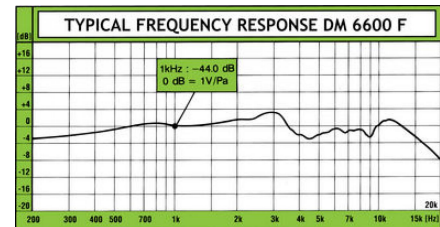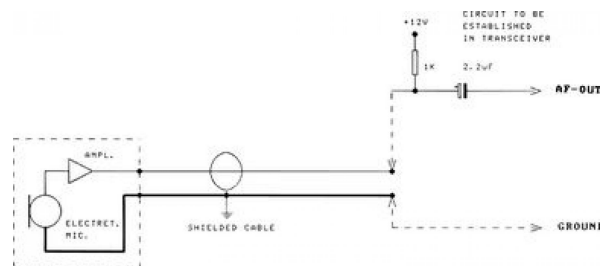

PROCOM A/S reserve the right to amend specifications without prior notice.  
24/11/11