

MK-P 1/2 - 900 /1800/1900 & 3G

Semi-flexible full 1/2 λ multiband whip antenna with FME-connector

Semi-flexible full 1/2 λ multiband whip antenna with integrated FME-female connector, especially made for portable and stationary wireless applications (M2M) in the GSM900/1800/1900 and UMTS (3G) systems


- FME CONNECTOR ADAPTER SYSTEM FOR UNIVERSAL FITTING
- 4 BANDS IN ONE INSTALLATION

ELECTRICAL SPECIFICATIONS:

FREQUENCY	880 - 960 MHz, 1710 - 1880 MHz, 1850 - 1990 MHz, 1920 - 2170 MHz (GSM900/1800/1900/UMTS/DECT)
IMPEDANCE	50 ohm
POLARISATION	Vertical
GAIN	0 dBd, 2.1 dBi
BANDWIDTH	See "FREQUENCY"
VSWR	< 2.0
MAX. POWER	10/5 W

MECHANICAL SPECIFICATIONS:

COLOR	Black
HEIGHT	170 mm
WEIGHT	17 g
MATERIALS	PE, copper, brass and Teflon
CONNECTOR 1	FME-female
MOUNTING PLACE	On modems etc.

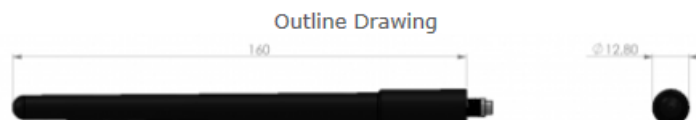

Midtkom vare nummer

26140 (FME version)

26148 (SMA version)