




FABBRICA CAVI - ANTENNE - ACCESSORI TV

# CW 0422.5

WARNING CABLE

CEI 20-22 II CEI-UNEL 36762 C-4 ( U<sub>o</sub> = 400 V )

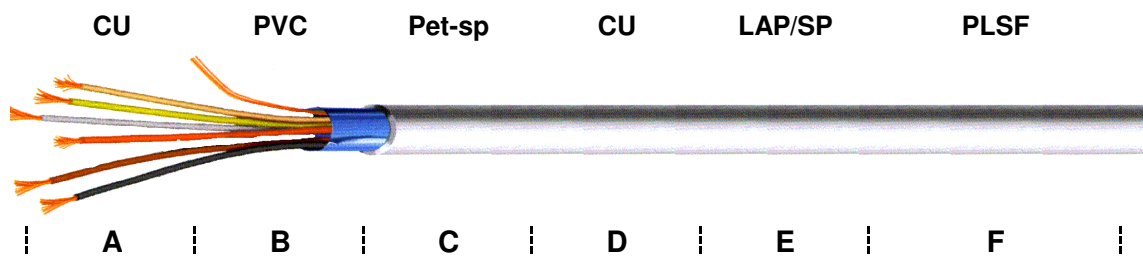

<b>A</b>	<b>INNER CONDUCTOR</b>	.....	PLAIN COPPER
<b>B</b>	<b>INSULATION</b>	.....	POLYVINYL-CHLORIDE
<b>C</b>	<b>NON-MIGRATING</b>	.....	SPIRAL POLYESTER TAPE
<b>D</b>	<b>DRAIN WIRE</b>	.....	PLAIN COPPER
<b>E</b>	<b>SHIELD</b>	.....	SPIRAL ALUMINIUM + POLYESTER TAPE COVERAGE 100%
<b>F</b>	<b>SHEATH</b>	.....	LOW SMOKE AND FUME POLYVINYL-CHLORIDE

- PRINTING

**SIVA CAVO ALLARME 4 X 0,22 + 2 X 0,50 CEI 20-22 II  
CEI-UNEL 36762 C-4 ( U<sub>o</sub> = 400 V ) MADE IN ITALY CE**

TEMPERATURE RANGE ..... -25°C / +80°C

## MECHANICAL DATA

	SECTION		SHEATH		WEIGHT KG/KM TOTAL
	4 x 0,22 mm <sup>2</sup>	2 x 0,50 mm <sup>2</sup>	ø	WHITE - RAL 9003	
<b>CW 0422.5</b>	4 x 0,22 mm <sup>2</sup>	2 x 0,50 mm <sup>2</sup>	ø 4,80 ± 0,20 mm	WHITE - RAL 9003	38,1
<b>CW 0422.5 G3</b>	4 x 0,22 mm <sup>2</sup>	2 x 0,50 mm <sup>2</sup>	ø 5,10 ± 0,20 mm	WHITE - RAL 9003	49,0
<b>CW 0422.5 G4</b>	4 x 0,22 mm <sup>2</sup>	2 x 0,50 mm <sup>2</sup>	ø 5,40 ± 0,20 mm	BLUE - RAL 5015	55,8

## ELECTRICAL PROPERTIES at 20°C

	VOLTAGE		CORES	RESISTANCE	MIN. RESISTANCE INSULATION
	OPERATING	TEST			
<b>CW 0422.5</b>	150 V	2000 V	96 Ohm/Km	39 Ohm/Km	200 MOhm/Km
<b>CW 0422.5 G3</b>	150 V	3000 V	96 Ohm/Km	39 Ohm/Km	200 MOhm/Km
<b>CW 0422.5 G4</b>	150 V	4000 V	96 Ohm/Km	39 Ohm/Km	200 MOhm/Km

The producer reserves himself to make modification on the item without any notice.